



# Planar VM Series LCD Video Wall




## High-Performance LCD Video Walls

The Planar® VM Series is a line of LCD displays that deliver a feature-rich video wall solution for demanding requirements of 24x7 and high ambient light applications. With a variety of sizes, bezel widths and brightness levels, the Planar VM Series offers a nearly seamless video wall solution and compelling value to fit an organization's needs.

The Planar VM Series features 49" or 55" Full HD LCD displays with tiled bezel widths of 0.88, 1.8 or 3.5mm, and between 450 and 700-nit brightness. The energy efficient Planar VM Series delivers high reliability to meet the demands of digital signage applications including retail, hospitality, corporate lobbies, casinos and museums.

Planar is proud to offer Planar VM Series video wall displays that have earned the U.S. government's ENERGY STAR® label.

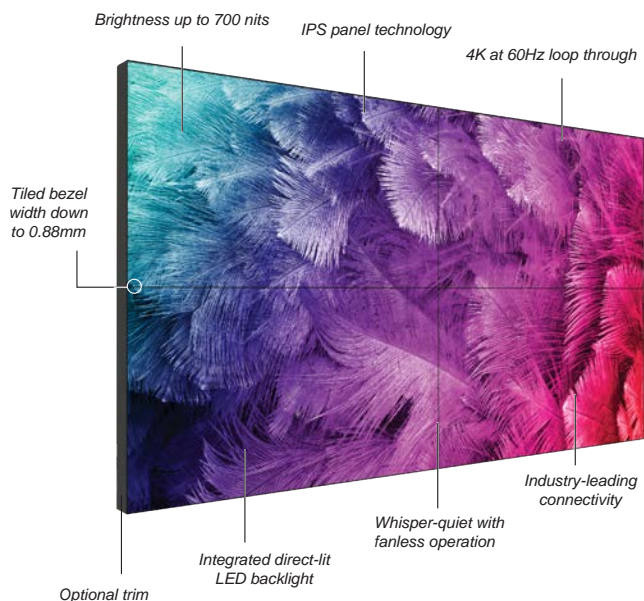

## Designed for High-Performance

- IPS technology provides outstanding viewing angles and contrast
- 4K @ 60Hz DisplayPort and HDMI connectivity including HDCP 2.2 compatibility
- 24x7 operation and reliability to support extended use
- Source failover to ensure continuous on-screen activity without downtime
- Fanless Display
- ENERGY STAR® certified

## Optimized for Tiled Installations

- Available in 49" or 55"
- Tiled bezel widths of 0.88mm, 1.8mm or 3.5mm
- Built-in video wall scaling to supports up to 10x10 display configurations
- VESA mounting compatibility
- Multiple daisy-chain signal support (DisplayPort, HDMI, DVI, and VGA)

## Video Wall Versatility

- Mountable in landscape or portrait orientation
- Multiple brightness options of 700-nit (MX models) and 450 or 500-nit (LX models) to optimize viewing in different ambient light environments
- OPS (Open Pluggable Specification) slot enables seamless integration of compatible digital signage hardware

## PLANAR VM SERIES SPECIFICATIONS

Model	VM55MX-M	VM55LX-M	VM55MX-X	VM55LX-X	VM55LX-U	VM49MX-X	VM49LX-U
Screen Diagonal	55"					49"	
Native Resolution	1920 x 1080						
Bezel Width	0.44mm even	0.44mm even	0.9mm even	0.9mm even	2.25mm (left/top), 1.25mm (right/bottom)	0.9mm even	2.3mm (left/top), 1.2mm (right/bottom)
Tiled Bezel Width	0.88mm even	0.88mm even	1.8mm even	1.8mm even	3.5mm	1.8mm even	3.5mm
Dimensions w/o handles (W x H x D)	47.7" x 26.8" x 3.7" (1211.5mm x 681.2mm x 93.2mm)		47.7" x 26.9" x 3.9" (1211.4mm x 682.2mm x 98.4mm)		47.8" x 26.9" x 3.9" (1213.4mm x 684.2mm x 99.3mm)	42.3" x 23.9" x 3.6" (1075.6mm x 605.8mm x 91.7mm)	42.4" x 23.9" x 3.7" (1077.6mm x 607.8mm x 93.5mm)
Display Technology	D-LED with Local Dimming						
Backlight	IPS						
Contrast Ratio Dynamic	20,000:1						
Full Viewing Angle	178°						
ENERGY STAR® Certified	Yes						
Brightness (cd/m <sup>2</sup> or nits)	700	500	700	500	500	700	450
Inputs	DisplayPort 1.2 in x 1, DisplayPort out, HDMI 2.0 in x 2 (HDCP 2.2), HDMI out, OPS x 1, OPS USB 2.0 x 2, OPS USB 3.0 x 1						
OPS Slot	Yes						
Control	IR, RS232, LAN, Keypad						
Image Scaling	4K at 60Hz upscaling and downscaling						
Speakers	10W x 2 built-in						
Mounting	VESA 400 x 400, Back						
Orientation	Landscape or Portrait						
Regulations	FCC Class A, cTUVus, CE						

