

Leyard Tfree

Ultra Light LED Transparent Screen

Cabinet Size

F: 1000 x 500 x 37mm
500 x 500 x 37mm



S: 1000 x 500 x 37mm
500 x 250 x 37mm

Application

Shop windows, TV stations, entertainment venues, shopping malls, high-end exhibition stands

Tfree Project Ultra-thin Series

Application: Indoor
Lifespan: ≥100,000 hrs
Cabinet Material: Aluminium / PC mask (optional)
Installation: Hanging / Fixed
Certificate: CE / FCC

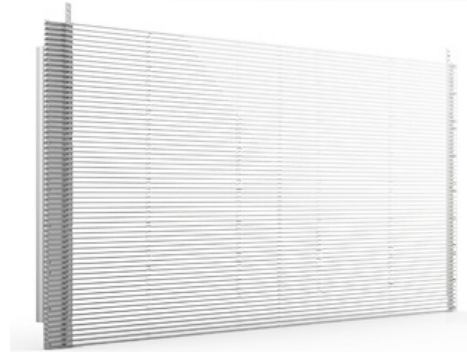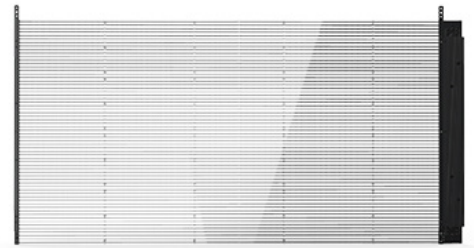

Light Transmissive	Colourful	Anti-vibration port	Anti-knock lamp design	Modular	Mixed batch use	140° wide viewing angle	Stable system

	Tfree-F3.9	Tfree-F7.8	Tfree-F10.4	Tfree-S3.9	Tfree-S7.8	Tfree-S10.4	Tfree
Pixel Pitch	3.9/7.8mm	7.8mm	10.4mm	3.9/7.8mm	7.9/7.8mm	10.4mm	15.6mm
Brightness (cd/dot)	800 / 4000	800 / 4000	800 / 3000	3000 ~ 5000	3000 ~ 5000	3000 ~ 5000	3000 ~ 5000
Pixel Density	32256	16348	9216	32256	16128	9216	4096
Transparency	≥61%	≥61%	≥70%	≥82%	≥82%	≥88%	≥92%
Cabinet Resolution	254 x 64 / 126 x 64	128 x 64 / 64 x 64	96 x 48 / 48 x 48	252 x 64 / 252 x 32	126 x 64 / 126 x 32	96 x 48 / 96 X 24	64 x 32 / 64 x 16
Weight	4kg / 2kg	4kg / 2kg	4kg / 2kg	4kg / 2kg	4kg / 2kg	4kg / 2kg	4kg / 2kg
IP Rate	IP30	IP30	IP30	IP30	IP30	IP30	IP30
Viewing Distance	>4m	>8m	>10m	>4m	>8m	>10m	>16m
Gray Scale	16 bit	16 bit	16 bit	16 bit	16 bit	16 bit	16 bit
Max. Power Consumption	600	600	600	680	680	680	680
Ave. Power Consumption	220	220	220	240	240	240	240
Refresh Rate	3840	3840	≥3840	≥3840	≥3840	≥3840	≥3840
Scan Mode	7S	4S	3S	6S	3S	2S	Static
Operation Power	AC100 ~ 240V, 50/60 Hz						
Control Mode	Synchronous display with control PC by DVI						
Supported Input	Composite, S-Video. Component, VGA, DVI, HDMI, HD-SDI						
Temperature	0°C ~ 40°C (operation) / -20°C ~ 60°C (storage)						
Humidity	35% ~ 85% (operation) / 10% ~ 90% (storage)						
Packaging	Flight Case						