

Ready in less than 3'



## Complete Plug-and-Play Mobile Solution For Flexible Environments

Leyard is offering a unique mobile LED solution that combines the unrivaled characteristics of Leyard® TVF1.5 Video Wall together with a high quality electronically adjustable ScreenLifter. The ScreenLifter is fabricated by the market leading manufacturer MediaScreen and designed in accordance to the latest technology and quality standards in ScreenLifter manufacturing.

At full HD resolution and a pixel pitch of 1.5mm the Leyard TVF1.5 LED Video Wall mounted in the ScreenLifter reaches a screen diagonal of 135in. This compact product comes in a flight case and is ready to use without losing any time with assembly and requires less man power to reach superior visual performance and value to customers due to excellent gamma grayscale.



ScreenLifter invented  
and designed by:

**MEDIA SCREEN**  
BILDKOMMUNIKATION GMBH

### Features & Benefits:


- Robust design
- Safe transport; 3 integrated shock absorber systems
- Front installation and serviceability
- Adjustable display height
- Outstanding image quality for Full HD resolutions
- Remote Control capability via Mobile App
- Installation process requires 1 person
- Comfortable and safe plug-and-play system

## Technical specifications

Type design:	TVF1.5 LED Video Wall with ScreenLifter
Screen Size:	135"
Pixel Pitch:	1.575mm
LED Type:	Commercial grade 3-in-1 Black SMD
Brightness Max:	600 nits
Contrast Ratio:	7000:1
Viewing Angle (H/V):	160°/140°
LED Refresh Rate:	3000 Hz
Color Temperature:	3000 - 10000K (Adjustable)
Resolution:	1920 x 1080px (Full HD)
Active Display Area:	3024 x 1701 mm
Inputs:	1 x HDMI + Loop, USB (Content)
Content Player:	Included (with PIP features)
Supported File Formats:	<ul style="list-style-type: none"> <li>• Video: AVI, WMV, MPG, RM/RMVB, MOV, DAT, VOB, MP4, FLV and etc.</li> <li>• Image: bmp, jpg, png, etc.</li> <li>• Others: txt, rtf, word, ppt, excel, etc.</li> </ul>
Special Features:	<ul style="list-style-type: none"> <li>• 4 video windows, multiple picture/text windows, scrolling text, Logo, date/time/week. Flexible screen split can be achieved and different contents display in different area</li> </ul>

Terminal Management:	LAN, USB
Terminal Control:	LAN, WiFi, USB, Android, iOS
Environment:	Indoor
Runtime Duty Cycle for Screen (Hours/Day):	24/7
Input voltage:	230V AC, 50Hz
Power Consumption:	4,5kW (Max)
Power Consumption:	1,35kW (Average)
Display size:	3030 x 1707mm
Weight (lifter + screen):	310kg
Total weight (+case):	560kg
Dimensions (W x H x D):	unpacked screen: 3030 x 1846 to 3196 x 740mm packed screen: 3150 x 2000 x 822mm
Storage Temperature / Humidity (degrees F/C) 10-85% relative humidity, non-condensing:	-20° to 60°C / -4° to 140°F
Operating Temperature / Humidity (degrees F/C) 10-85% relative humidity, non-condensing:	+5°C to 40°C / 41° to 140°F

Dimensions of unpacked Leyard TVF1.5 LED Video Wall with ScreenLifter (in mm):

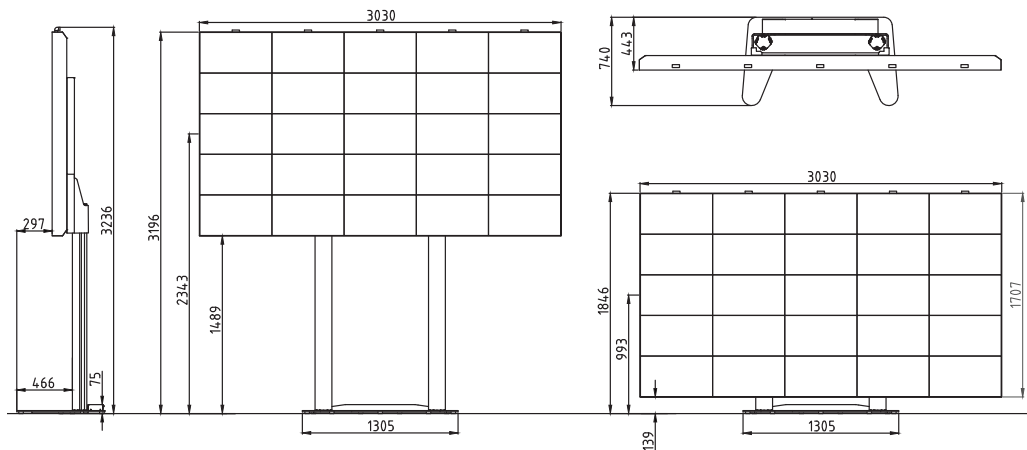

Dimensions of packed Leyard TVF1.5 LED Video Wall with ScreenLifter (in mm):

